

SLIMDUCT™ MD

Stylishly designed, SLIMDUCT MD series will compliment any interior or exterior design scheme

Innovation

Discreet Interior Design

No Visible Screws

Blend in well with the overall color scheme of the interior of any room.



SLIMDUCT SD



SLIMDUCT MD

Function

Excellent Performance

Flame Retardant


SLIMDUCT MD is made from flame retardant materials*.

*Excludes some items.

MD

SLIMDUCT MD

Straight trunking



Item No.	Color Variation	A	B	Pcs/Pkg
MD-751-W	☐	75	65	5
MD-851	☐	85	70	5

MK

90° FLAT ELBOW



Item No.	Color Variation	A	B	C	D	Pcs/Pkg
MK-75-W	☐	80	68	74	114	20
MK-85	☐	90	73	79	124	10

MP

SOFFIT INLET



Item No.	Color Variation	A	B	C	D	E	F	G	H	Pcs/Pkg
MP-75-W	☐	80	67.5	110	132	102	8	40	15	20
MP-85	☐	92	73	115	135	110	10	40	15	10

MJ


COUPLER



Item No.	Color Variation	A	B	Pcs/Pkg
MJ-75-W	☐	80	67.5	20
MJ-85	☐	90	72.5	10

MS

GASKET

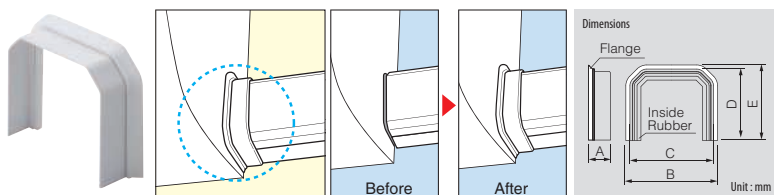

Item No.	Color Variation	A	B	C	D	E	Pcs/Pkg
MS-75	☐	24.5	90	82	70	74	20
MS-85	☐	24.5	100	92	75	79	20

*Material ... Main part : PVC Flange : Synthetic rubber

*The MS may not be suitable for use with indoor A/C units from all manufacturers. A crevice is made when installation to an attachment part with level difference or the curved surface beyond R25.

MCI


90° INSIDE VERTICAL ELBOW



Item No.	Color Variation	A	B	C	Pcs/Pkg
MCI-75-W	☐	80	90	43	20
MCI-85	☐	90	94	54	10

MCO

90° OUTSIDE VERTICAL ELBOW

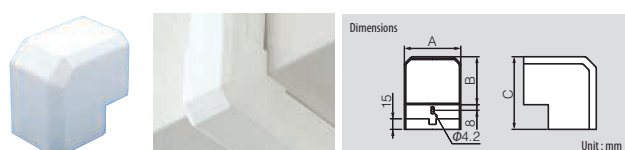

Item No.	Color Variation	A	B	C	Pcs/Pkg
MCO-75-W	☐	80	68	103	20
MCO-85	☐	90	73	109	10

MKF



45° FLAT ELBOW



Item No.	Color Variation	A	B	C	D	Pcs/Pkg
MKF-75-W	☐	80	70	63	30	20
MKF-85	☐	90	75	68	31	10

MT


T JOINT

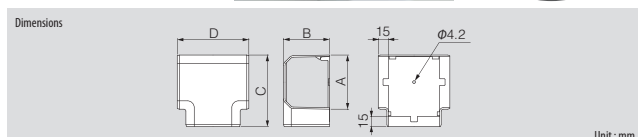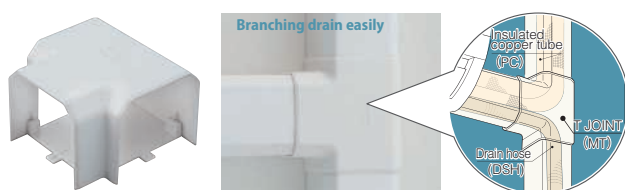

Item No.	Color Variation	A	B	C	D	Pcs/Pkg
MT-75-W	☐	80	68	105	105	10
MT-85	☐	90	73	115	115	10

MN


90° TWIST ELBOW

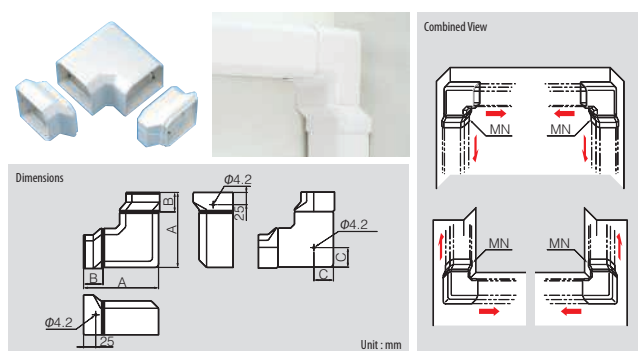

Item No.	Color Variation	A	B	C	Pcs/Pkg
MN-75-W	☐	154	40	40	5
MN-85	☐	169	45	45	5

MW

WALL INLET

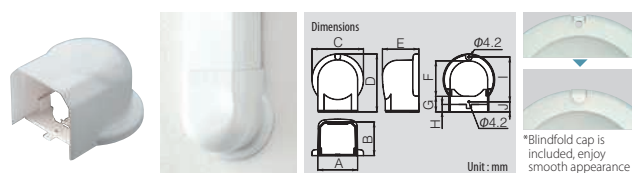

Item No.	Color Variation	A	B	C	D	E	F	G	H	I	J	Pcs/Pkg
MW-75-W	☐	80	67.5	103	116	73	71	31	15	90	20	20
MW-85	☐	90	72.5	123	128.5	76	83	27	15	102.5	20	10

SLIMDUCT MD series

Specifications

Temperature Range	-20 ~ 60°C
Application	Wall Mounted
Material	Rigid Polyvinyl Chloride (Flame Retardant) *Excludes some items

The table below shows the maximum size piping combinations that can be run in SLIMDUCT MD :

Item No.	Insulation Thickness 10×10mm
MD-751-W	6.35×9.52 - 6.35×12.70 + DSH-14
MD-851	Ventilation hose (O.D. less than φ37) + 6.35×9.52 - 6.35×12.70 + DSH-14 or 6.35×9.52 - 9.52×15.88 + DSH-14

Color Variation: ☐ ...White, ☐ ...Ivory, ☐ ...Gray, ☐ ...Brown, ☐ ...Black
Trunking System (For Residential Use)